

PRODUCT CATALOG



BJE[®]

OIL AND LUBE PRODUCTS

 **Husky** : A BREED APART



Tank Gauges (continued)



Features	Black Knight® Liquid Level Gauge	Metric Black Knight® Liquid Level Gauge	Red Fox® Liquid Level Gauge	Metric Red Fox® Liquid Level Gauge	Seasee Drum Gauge
For use with new oil, waste oil, diesel fuel, antifreeze, and water. Not intended or recommended for gasoline or highly flammable liquids.	●	●	●	●	●
Indicates inches left (99-0") until tank is EMPTY – numbers decrease as fluid level lowers	●				
Indicates inches left (0-99") until tank is FULL – number decrease as fluid level rises			●		
Indicates centimeters left (365-0 cm) until tank is EMPTY – numbers decrease as fluid level lowers		●			
Indicates centimeters left (0-365 cm) until tank is FULL – numbers decrease as fluid level rises				●	
2" NPT threads	●	●	●	●	
Easy installation	●	●	●	●	●
Nickel plated brass chain	●	●	●	●	
Large number display	●	●	●	●	
Molded housing	●	●	●	●	
Direct drive	●	●	●	●	
1.66" vertical float available	●	●	●	●	
2" horizontal float available	●	●	●	●	
Zinc-plated aluminum faucet					●
Zinc-plated steel drum gauge with visible fluid level					●
Quick disconnect gauge fitting					●
For most fluids except concentrated acids or bases					●
Fits 55 gallon drums with 3/4" NPT bung					●

Tank Monitors and Alarms



Features	Sentry Tank Monitor	Sentry Wall Mount Tank Monitor	007 Tank Monitor
Avoid costly overflows	●	●	●
Engineered for most single and double walled	● Above ground tanks	● Above ground tanks	● Above ground tanks
Battery	● 9 Volt (upgradeable to AC power)	● 9 Volt (upgradeable to AC power)	
Easy Battery Replacement			
Alarm sounds	●	●	●
Low Battery Alert	●	●	
Ideal for remote areas where AC power is not accessible	●	●	
Easy installation	●	●	●
Supervised system			●
Low voltage	●	●	●
Siren Alert	●	●	●
Strobe			●
Audible Alert			
Drives up to 10 solenoid valves			●
Max milliamperere load 750/mA. Do not exceed			●
Fully pneumatic – no electrical parts			
Polypropylene float (not affected by oils or most other chemicals)			
Operating Range 30-200 psi			
Waterproof Self-Contained Housing (ensures contaminant-free monitoring)			
On/Off/Test Switch	●	●	●
PVC/ABS Plastics Construction	●	●	●
Fits 3/4" NPT vent opening			
Not recommended for liquids with a specific gravity less than .85.			
UL Buna N sensor	●	●	●
High level actuation point = 3" Low level actuation point = 2"			
Displays drum levels from 90% to 5%. Alerts			
Automatically ensures the waste fuel tank is full for optimum heating			
Can manually fill waste fuel tank when business is closed			
Available in custom lengths from 24" to 78" (610-1981mm)			



TM3 Air Shut-off Valve

- Shuts off air supply to pumps
- Above ground tanks



55 Drum Alert

9 Volt (provided)




FNTM Drum Gauge



Kaltey Commander Tank Controller

- Indoor waste fuel tanks

Tank Gauges (continued)

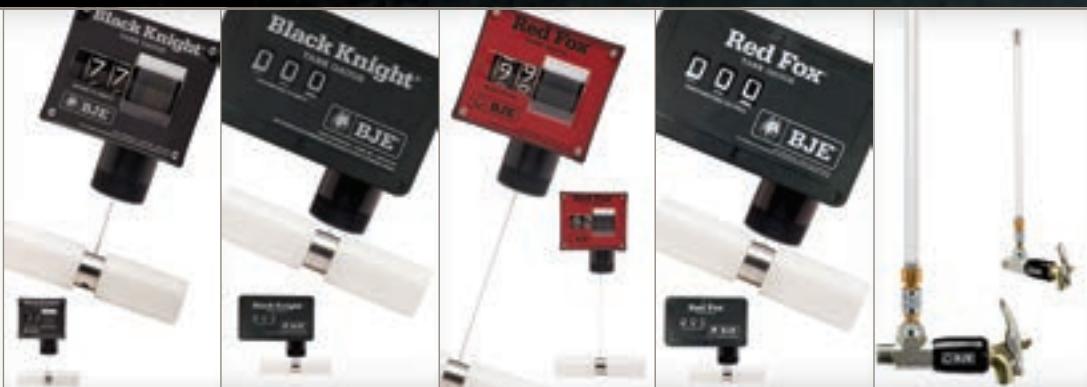

Features	Black Knight® Liquid Level Gauge	Metric Black Knight® Liquid Level Gauge	Red Fox® Liquid Level Gauge	Metric Red Fox® Liquid Level Gauge	Seasee Drum Gauge
For use with new oil, waste oil, diesel fuel, antifreeze, and water. Not intended or recommended for gasoline or highly flammable liquids.	●	●	●	●	●
Indicates inches left (99-0") until tank is EMPTY – numbers decrease as fluid level lowers	●				
Indicates inches left (0-99") until tank is FULL – number decrease as fluid level rises			●		
Indicates centimeters left (365-0 cm) until tank is EMPTY – numbers decrease as fluid level lowers		●			
Indicates centimeters left (0-365 cm) until tank is FULL – numbers decrease as fluid level rises				●	
2" NPT threads	●	●	●	●	
Easy installation	●	●	●	●	●
Nickel plated brass chain	●	●	●	●	
Large number display	●	●	●	●	
Molded housing	●	●	●	●	
Direct drive	●	●	●	●	
1.66" vertical float available	●	●	●	●	
2" horizontal float available	●	●	●	●	
Zinc-plated aluminum faucet					●
Zinc-plated steel drum gauge with visible fluid level					●
Quick disconnect gauge fitting					●
For most fluids except concentrated acids or bases					●
Fits 55 gallon drums with 3/4" NPT bung					●

Oil Filter Crushers



Pneumatic	C-4 Pneumatic Automobile Oil Filter Crusher	C-6 Pneumatic SUV/Light Truck Oil Filter Crusher	TT-12 Pneumatic Large Truck Oil Filter Crusher	TT-25 Electric Hydraulic Tractor Trailer Oil Filter Crusher
Reduces filters by 75% of original size, and removes 95% of the free-flowing oil so it can be recycled	●	●	●	●
Cast iron 1-piece housing	●	●	●	●
Cast iron 1-piece chamber door	●	●	●	●
Safety door – crusher will not operate if door is opened	●	●	●	●
Lifetime warranty on housing, one year limited on all other parts	●	●	●	●
Full Buna U-cup	●	●	●	
Shaft size	1 1/2"	2"	2"	
Shaft and return spring are the only moving parts	●	●	●	
Composite air cylinder	●	●	●	
Oilless bronze lower bearing	●	●	●	
Air requirement	125 to 175 PSI	125 to 175 PSI	145 to 175 PSI	
Air regulator not needed if supply air is less than 175 PSI	●	●	●	
Oil and lubricator not needed	●	●	●	●
Heavy duty hydraulic ram				●
Heavy duty 2 hp electric motor				●
Standard liquid filled pressure gauge				●
Automatic crushing cycle				●
Hydraulic pump				1 Phase/230 Volt
Wall mounting brackets included	●			
12" flexible drain hose included	●	●		
Maximum size filter for crushing chamber	7 1/2" H x 5" diameter	10" H x 7" diameter	17" H x 8" diameter	16 1/2" H x 8" diameter
Cycle time	5 seconds	7 seconds	25 seconds	55 seconds
Dimensions of crusher	27 1/2" H x 12 1/2" W x 11 1/2" D	32 1/2" H x 13 1/2" W x 13" D	50 1/2" H x 18" W x 17" D	49 1/2" H x 16 1/2" W x 26" D
Dimensions with optional stand	63 1/2" H x 21 1/2" W x 22" D	70" H x 21" W x 22" D	88" H x 22 1/2" W x 22 1/2" D	87" H x 22 1/2" W x 27 1/2" D
Crusher shipping weight	116 lbs	220 lbs	428 lbs	463 lbs
Crusher shipping weight with stand	220 lbs	340 lbs	540 lbs	575 lbs
Trucked on pallet	● (if with stand)	●	●	●
Small crusher stand: 37" tall x 22" wide 60 lbs	●	●		
Large crusher stand with reservoir: 37" tall x 22 1/4" deep x 22 1/4" wide 112 lbs			●	●